




Specification for:  
**ZM41003TC**

110 Zeta Drive  
Pittsburgh, PA 15238  
Phone: 412/696-1333  
Fax: 412/696-0333  
Email: [magnetics@spang.com](mailto:magnetics@spang.com)

**DIMENSIONS**

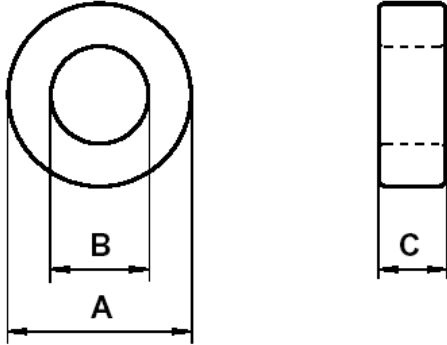

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	9.53	9.27	10.29
I.D. (B)	4.75	3.98	5.02
Ht. (C)	3.18	3.05	3.81

Eff. Parameters		
$A_e$ mm <sup>2</sup>	$l_e$ mm	$V_e$ mm <sup>3</sup>
7.3	20.7	151

**INDUCTANCE**

AL value (nH/T <sup>2</sup> )	Test conditions
6644± 30%	10 kHz, 0.5 mT (For N = 5, use 0.078mA), 25°C

**ELECTRICAL LOSSES**

$\tan \delta / \mu_i$	Production lot limit Average	Test conditions
$\leq 10.0 \cdot 10^{-6}$	$\leq 9.0 \cdot 10^{-6}$	10 kHz, 0.5 mT, 25°C

**COATING**

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1,500 V Min Wire-to-Wire.

**NOTE**

Spec. Modifications	Previous	Revised